(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 20 January 2005 (20.01.2005)

PCT

(10) International Publication Number WO 2005/005869 A1

- (51) International Patent Classification7: F16H 61/04. 59/16, B60K 41/22, G01L 1/22 // B60K 41/28
- (21) International Application Number:

PCT/GB2004/002955

(22) International Filing Date:

8 July 2004 (08.07.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0316004.1

8 July 2003 (08.07.2003) GB

0316403.5

14 July 2003 (14.07.2003) GB


- (71) Applicant (for all designated States except US): ZE-ROSHIFT LIMITED [GB/GB]; 7 Darin Court, Crownhill Business Park, Milton Keynes MK8 0AD (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): MARTIN, William. Wesley [NZ/GB]; 22 Goodman Gardens, Woughton on the Green, Milton Keynes (GB).

- (74) Agent: RAYNOR, Simon, Mark; Urquhart-Dykes Lord LLP, Midsummer House, Midsummer Boulevard, Central Milton Keynes MK39 3BN (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM. ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

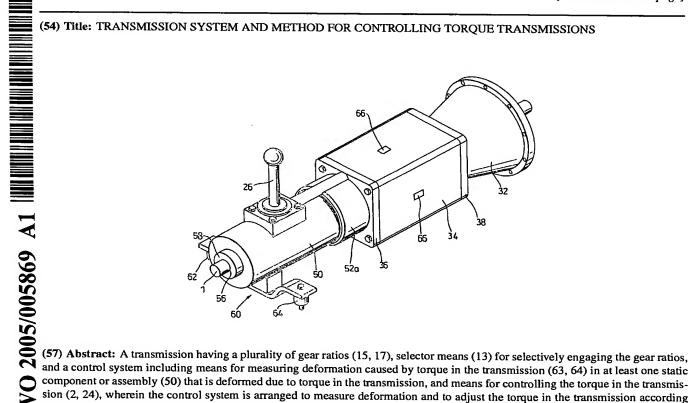

component or assembly (50) that is deformed due to torque in the transmission, and means for controlling the torque in the transmission (2, 24), wherein the control system is arranged to measure deformation and to adjust the torque in the transmission according to the measured deformation and a known relationship between the gear ratios.

WO 2005/005869 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.